




Накладные петли для тонких фасадов

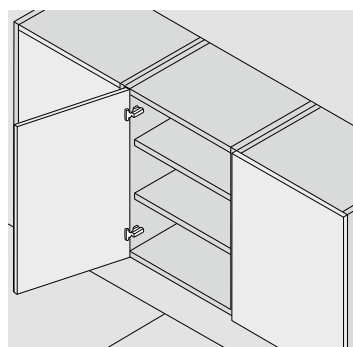

- угол открывания 105°
- для фасадов 10 - 20 мм
- глубина чашки петли 7,8 мм
- упаковка - 200 шт

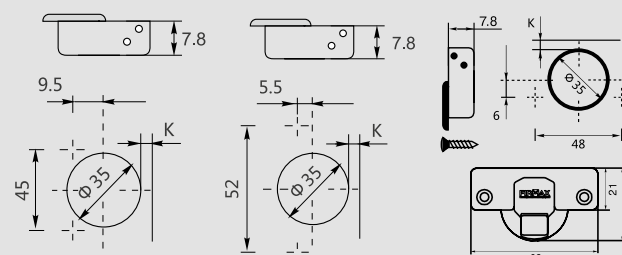

Минимальная фуга (A)




T=	10	11	12	13	14	15	16	17	18	19	20
K=3	A=	0.0	0.1	0.2	0.3	0.4	0.6	0.8	1.0	1.2	1.5
K=4	A=	0.0	0.1	0.2	0.3	0.4	0.6	0.8	1.0	1.2	1.4
K=5	A=	0.0	0.1	0.2	0.3	0.4	0.6	0.7	0.9	1.2	1.4
K=6	A=	0.0	0.1	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.4

T = толщина фасада


K = расстояние до чашки фасада

Минимальный зазор между корпусом (L)



T=	10	11	12	13	14	15	16	17	18	19	20
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	0.8
K=5	L=	0.2	0.4	0.5	0.7	0.9	1.0	1.2	1.4	1.6	1.7
K=6	L=	1.1	1.2	1.4	1.6	1.7	1.9	2.0	2.2	2.4	2.5

Накладная



Цвет	Никель		
Межосевое расстояние	45 мм	48 мм	52 мм
С доводчиком	FRM8100.10/45	FRM8100.10	FRM8100.10/52
Без доводчика	FRM8100.10.1/45	FRM8100.10.1	FRM8100.10.1/52
Без пружины	FRM8100.10.P/45	FRM8100.10.P	FRM8100.10.P/52